




12V and 24V - DC



UP1-J



12V
24V



Dim. 152 x 95 x 82 mm

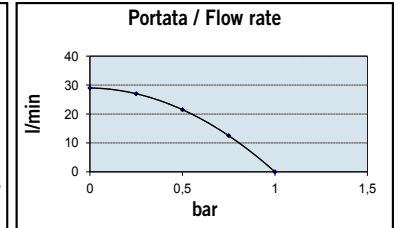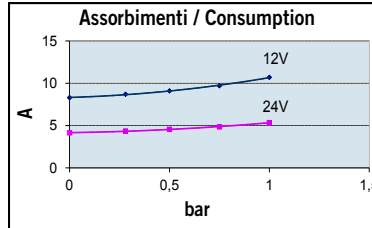


PORTATA FLOW RATE max.	PRESSIONE PRESSURE max.	CODICE PART NUMBER	VOLTS	ADESCAM. SELF-PRIM. m	CONS.	MOTORE MOTOR	FUSIBILE FUSE	TUBO TUBE	BOCCHIE PORTS	PESO WEIGHT
28 l/min 7.4 gpm	1 bar 14.5 psi	162 004 12	12	1,5	8A	150W	10A	20 mm	3/8" BSPP	1,8 kg
		162 004 13	24	1,5	4A	150W	7,5A	20 mm	3/8" BSPP	1,8 kg

UP1-JS



On/Off switch



12V
24V



Dim. 194 x 95 x 89 mm

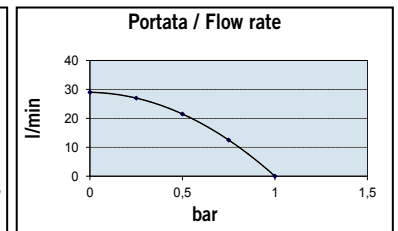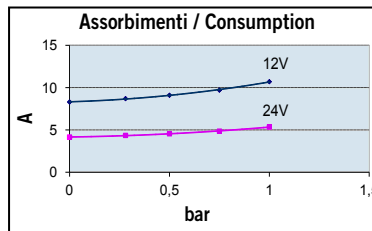


PORTATA FLOW RATE max.	PRESSIONE PRESSURE max.	CODICE PART NUMBER	VOLTS	ADESCAM. SELF-PRIM. m	CONS.	MOTORE MOTOR	FUSIBILE FUSE	TUBO TUBE	BOCCHIE PORTS	PESO WEIGHT
28 l/min 7.4 gpm	1 bar 14.5 psi	162 010 12	12	1,5	8A	150W	10A	20 mm	3/8" BSPP	1,8 kg
		162 010 13	24	1,5	4A	150W	7,5A	20 mm	3/8" BSPP	1,8 kg

UP1-JR



On/Off 3 positions reversing switch



12V
24V



Dim. 194 x 95 x 89 mm

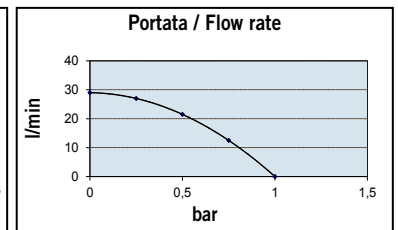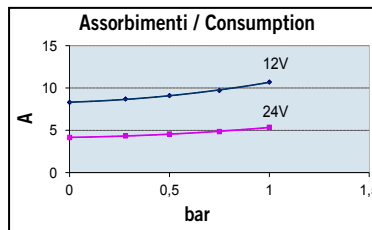

PORTATA FLOW RATE max.	PRESSIONE PRESSURE max.	CODICE PART NUMBER	VOLTS	ADESCAM. SELF-PRIM. m	CONS.	MOTORE MOTOR	FUSIBILE FUSE	TUBO TUBE	BOCCHIE PORTS	PESO WEIGHT
28 l/min 7.4 gpm	1 bar 14.5 psi	162 011 12	12	1,5	8A	150W	10A	20 mm	3/8" BSPP	1,8 kg
		162 011 13	24	1,5	4A	150W	7,5A	20 mm	3/8" BSPP	1,8 kg